



REV.	DESCRIPTION	DATE
A		2019-06-03
B		

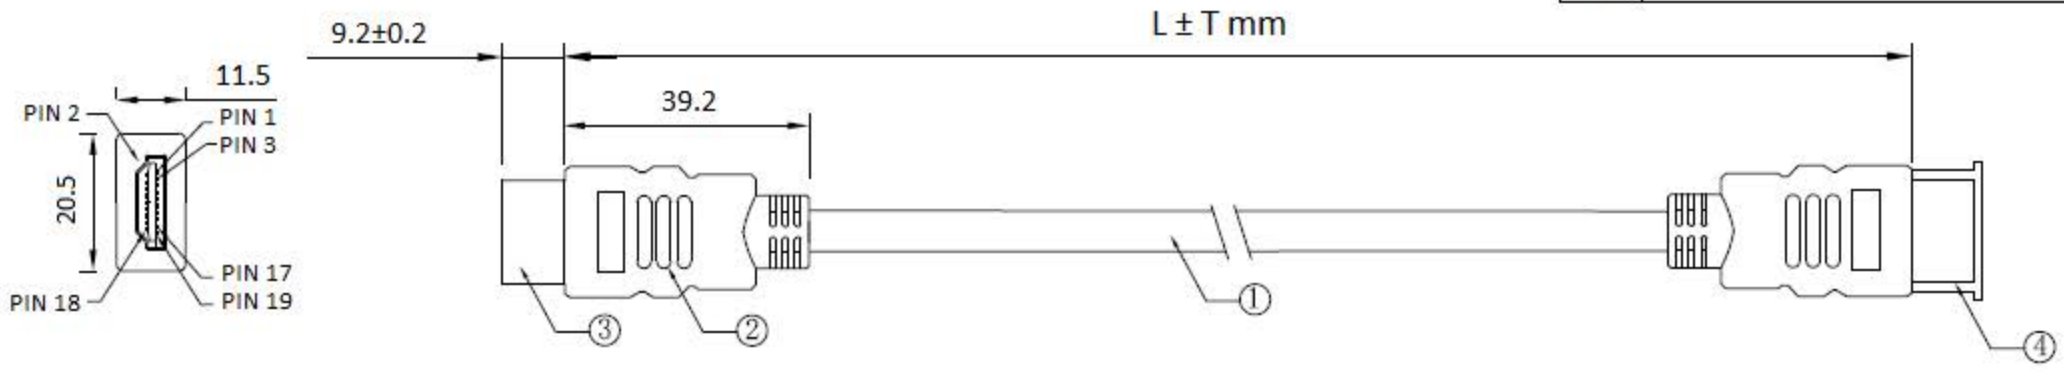



Pin Assignment

Cable Specifications:

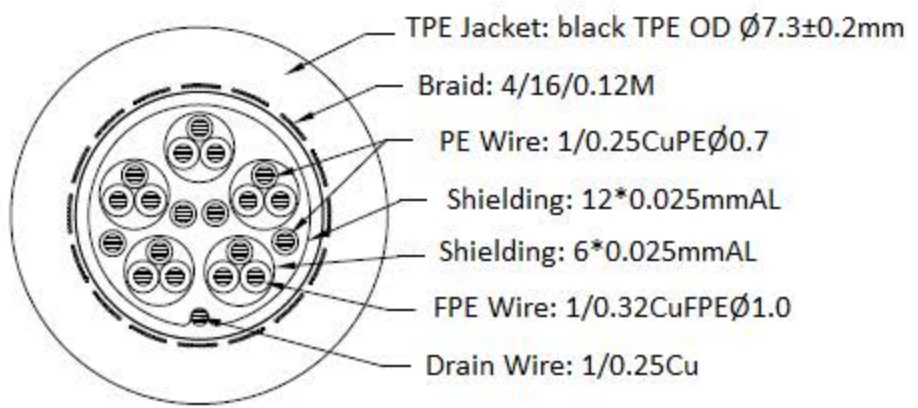

Test Standard:

- 100% pass open circuit, short circuit, dislocation test
- On-resistance: 3Ω Max.
- Insulation resistance: 5MB Ω Min/DC300V/10ms
- 100% pass 4K @30Hz TV test

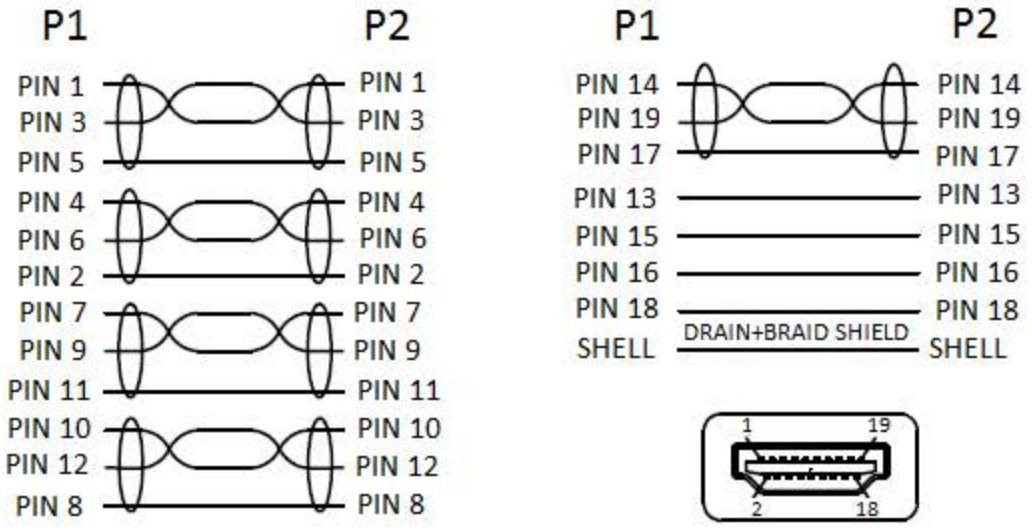

Item No.	Length
11.04.5934	5000 ± 30mm
11.04.5935	7500 ± 30mm

BOM LIST

NO.	SPECIFICATIONS	M	KG	PCS
1	HDMI 28-30AWG (1/0.32Cu*1P+1/0.25Cu+AL)*5+1/0.25Cu*4C+AL+D1/0.25Cu+64AM+TPE	M		
2	TPE Black 45P RoHS 2.0 / REACH	KG		
3	HDMI 19 Pin 24K Gold Plated Connector	KG		
4	Dust Cap	PCS		

Item No.	11.04.5934, 11.04.5935			
ROLINE HDMI High Speed + Ethernet Cable Flexible TPE, M/M, black			Drawer	Ming
Material			TPE	SCALE
REV.			A	UNIT
Drawing No.				

