


Skizze / Bild

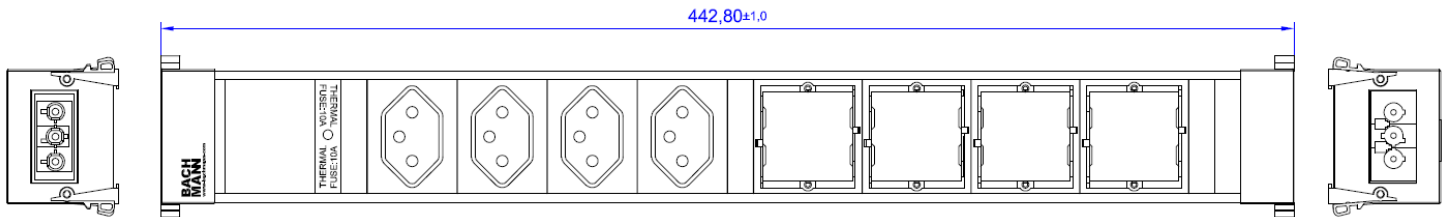

<p>Conference Steckdosenleiste</p> <p>Steckdosen:</p> <ul style="list-style-type: none"> • 4 x CH T13 Steckdosen Schweiz • Nach SN SEV 1011:2009/A1:2012 • Nach SN SEV 6535:2009 • 10A 250V~, IP 20 • 2-polig mit Schutzkontakt, • Farbe schwarz <p>Sicherung:</p> <ul style="list-style-type: none"> • Thermosicherung 10A <p>Custom Module:</p> <ul style="list-style-type: none"> • 4 x Abdeckung für Custom Module leer <p>Anschluss:</p> <ul style="list-style-type: none"> • GST18 Stromeingang und -ausgang <p>Profil:</p> <ul style="list-style-type: none"> • Eloxiertes Aluminium <p>Kunststoff:</p> <ul style="list-style-type: none"> • PA 6 GF, schwarz <p>Endkappen:</p> <ul style="list-style-type: none"> • Genietet, nicht wiederanschließbar <p>Abmessungen (Länge x Breite x Höhe) in mm:</p> <ul style="list-style-type: none"> • Ca. 442,8 x 52 x 44 <p>Lieferform:</p> <ul style="list-style-type: none"> • Im Karton verpackt <p>Lieferumfang:</p> <ul style="list-style-type: none"> • 1x Steckdoseneinheit Conference 	<p>Conference power strip</p> <p>Sockets:</p> <ul style="list-style-type: none"> • 4 x CH T13 Swiss sockets • According to SN SEV 1011:2009/A1:2012 • According to SN SEV 6535:2009 • 10A 250V~, IP 20 • 2-pole earthing contact, • Color black <p>Sicherung:</p> <ul style="list-style-type: none"> • Thermal fuse 10A <p>Custom Module:</p> <ul style="list-style-type: none"> • 4 x cover for custom module <p>Connection:</p> <ul style="list-style-type: none"> • GST18 Power input and output <p>Profile:</p> <ul style="list-style-type: none"> • Anodised aluminium <p>Plastic material:</p> <ul style="list-style-type: none"> • PA 6 GF, black <p>Endcaps:</p> <ul style="list-style-type: none"> • With rivets, non rewirable <p>Measurements (length x width x height) in mm:</p> <ul style="list-style-type: none"> • Approx. 442,8 x 52 x 44 <p>Packing:</p> <ul style="list-style-type: none"> • In carton <p>Extent of delivery:</p> <ul style="list-style-type: none"> • 1x PDU CONFERENCE
--	---