


13100-150 PSU 19" AC/DC MAXPOWER 180 W, SINGLE, MAX 105

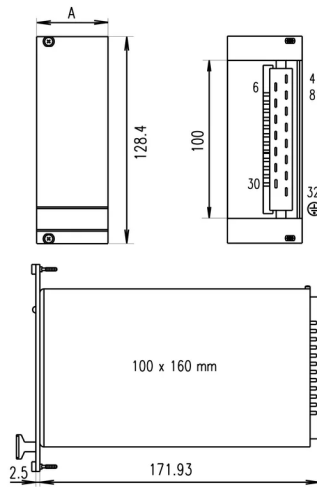

KEY FEATURES

Wide input voltage range 90 ... 254 VAC and 100 ... 360 VDC with active Power Factor Correction (PFC)

1 output voltage

Signalling: Output voltage OK

Efficiency up to 87 %

Integrated active decoupling for redundancy operation

Active Current Share Bus (CSB)

PRODUCT ATTRIBUTES

Product Type: Power Supply

Type: 19" Switched-Mode

Input Voltage AC: 90 – 264 V

Power: 150 W

Number of Output Voltages: 1

Voltage 1: 5 V

Current 1: 30 A

Rack Height: 3 U

Rack Width: 8 HP

ADDITIONAL PRODUCT DETAILS

Pluggable 19" Power Supplies with H15 connector for fanless applications. With wide range AC input and one output voltage.

Please order front panel separately.

Output data for mains voltage > 190 VAC, TA = 0-... 50 °C.

CERTIFICATIONS



North America

All locations

+1.763.422.2661

Chat with us:

schroff.nvent.com

Europe

Straubenhardt, Germany

+49.7082.794.0

Betschdorf, France

+33.3.88.90.64.90

Warsaw, Poland

+48.22.209.98.35

Assago, Italy

+39.02.932.7141

Chat with us:

schroff.nvent.com

Asia

Shanghai, China

+86.21.2412.6943

Qingdao, China

+86.532.8771.6101

Singapore

+65.6768.5800

Shin-Yokohama, Japan

+81.45.476.0271

Chat with us:

schroff.nvent.com

Middle East & India

Dubai, United Arab Emirates

+971.4.378.1700

Bangalore, India

+91.80.6715.2001

Istanbul, Turkey

+90.216.250.7374

Chat with us:

schroff.nvent.com



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**

© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.