



60110-291 SOCKET STRIP, IEC C13 WITH OPEN END CONNECTION CABLE, 12X IEC C13, 19"

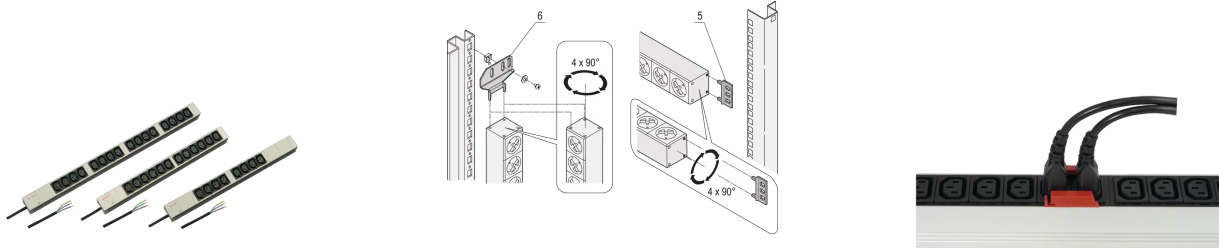

KEY FEATURES

230 V, 10 A

Horizontal and vertical mounting

Socket strips can be rotated through all four directions (in 90° increments) during installation

Socket strips with IEC 60320-C13 sockets

Connecting cable 2 m, open end with ferrules

In accordance with IEC 60320

Mounting height 1 U

PRODUCT ATTRIBUTES

Socket Type: IEC C13

Number of Sockets: 12

Color: Grey

With Switch: No

Length: 438.5 mm

Voltage AC: 230 V

Depth: 44 mm

ADDITIONAL PRODUCT DETAILS

Modular, compact PDU with many function elements. Using a 1 U by 1 U aluminum chassis the PDU can easily be integrated in a rack with IEC C13 outlets.

Please order bracket for vertical mounting separately.

CERTIFICATIONS



North America

All locations

+1.763.422.2661

Chat with us:

schroff.nvent.com

Europe

Straubenhardt, Germany

+49.7082.794.0

Betschdorf, France

+33.3.88.90.64.90

Warsaw, Poland

+48.22.209.98.35

Assago, Italy

+39.02.932.7141

Chat with us:

schroff.nvent.com

Asia

Shanghai, China

+86.21.2412.6943

Qingdao, China

+86.532.8771.6101

Singapore

+65.6768.5800

Shin-Yokohama, Japan

+81.45.476.0271

Chat with us:

schroff.nvent.com

Middle East & India

Dubai, United Arab Emirates

+971.4.378.1700

Bangalore, India

+91.80.6715.2001

Istanbul, Turkey

+90.216.250.7374

Chat with us:

schroff.nvent.com



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**

© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.