


# 69001-821 CONNECTOR TYPE C, EN 60603, DIN 41612, MALE, 64 CONTACTS, SOLDER PINS, 3 MM

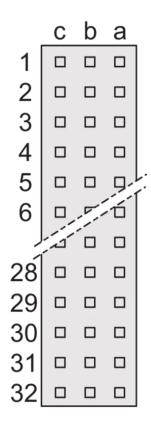

## **KEY FEATURES**

Requirement class 2 as per EN 60603 (DIN 41642)

Separate coding

## **PRODUCT ATTRIBUTES**

Product Type: Connector

Type: Male Connectors

Works With: Front Panels

Number of Contacts: 64

Contact Material: Gold Plated

Connector Pitch: 2.54 mm

Min Creepage Distance, Contact-Contact: 1.2 mm

Min Air Gap, Contact-Contact: 1.2 mm

Max Current @ 20°C: 2 A

Max Contact Resistance: 20 mO

Max Insertion and Withdrawal Force: 60 N

Test Voltage (Ueff), Contact-Contact: 1 kV

Test Voltage (Ueff), Contact-Earth: 1.55 kV

Row Assignment: A; C

## ADDITIONAL PRODUCT DETAILS

Male / Female DIN connector form C.

Requirement class 2 as per EN 60603 (DIN 41642).

## CERTIFICATIONS



#### **North America**

All locations +1.763.422.2661 Chat with us: schroff.nvent.com

#### Europe

Straubenhardt, Germany +49.7082.794.0 Betschdorf, France +33.3.88.90.64.90 Warsaw, Poland +48.22.209.98.35 Assago, Italy +39.02.932.7141 Chat with us: schroff.nvent.com

#### Asia

Shanghai, China +86.21.2412.6943 Qingdao, China +86.532.8771.6101 Singapore +65.6768.5800 Shin-Yokohama, Japan +81.45.476.0271 Chat with us: schroff.nvent.com

nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

#### Middle East & India

Dubai, United Arab Emirates +971.4.378.1700 Bangalore, India +91.80.6715.2001 Istanbul, Turkey +90.216.250.7374 Chat with us: schroff.nvent.com



© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

Our powerful portfolio of brands:

nVent reserves the right to change specifications without notice.