




69001-846 CONNECTOR TYPE F, EN 60603, DIN 41612, MALE, 48 CONTACTS, SOLDER PINS, 2.9 MM

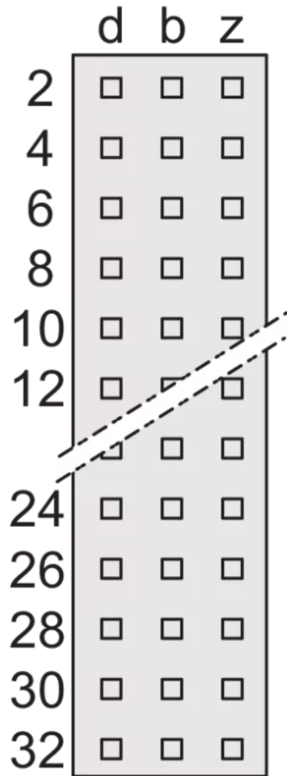

KEY FEATURES

Requirement class 2 as per EN 60603 (DIN 41642)

Separate Coding

PRODUCT ATTRIBUTES

Product Type: Connector

Type: Male Connectors

Works With: Front Panels

Number of Contacts: 48

Contact Material: Gold Plated

Connector Pitch: 5.08 mm

Min Creepage Distance, Contact-Contact: 3 mm

Min Air Gap, Contact-Contact: 1.6 mm

Max Current @ 20°C: 6 A

Max Contact Resistance: 20 mΩ

Max Insertion and Withdrawal Force: 75 N

Test Voltage (Ueff), Contact-Contact: 1.55 kV

Test Voltage (Ueff), Contact-Earth: 2.5 kV

Row Assignment: Z; B; D

ADDITIONAL PRODUCT DETAILS

Male / Female DIN connector form F. Requirement class 2 as per EN 60603 (DIN 41642).

CERTIFICATIONS



North America

All locations
+1.763.422.2661
Chat with us:
schroff.nvent.com

Europe

Straubenhardt, Germany
+49.7082.794.0
Betschdorf, France
+33.3.88.90.64.90
Warsaw, Poland
+48.22.209.98.35
Assago, Italy
+39.02.932.7141
Chat with us:
schroff.nvent.com

Asia

Shanghai, China
+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
schroff.nvent.com

Middle East & India

Dubai, United Arab Emirates
+971.4.378.1700
Bangalore, India
+91.80.6715.2001
Istanbul, Turkey
+90.216.250.7374
Chat with us:
schroff.nvent.com



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**

© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.