


69004-131 DOUBLE TEST SOCKET, Ø 2 MM, SHORT TYPE FOR MOUNTING PLANE 1

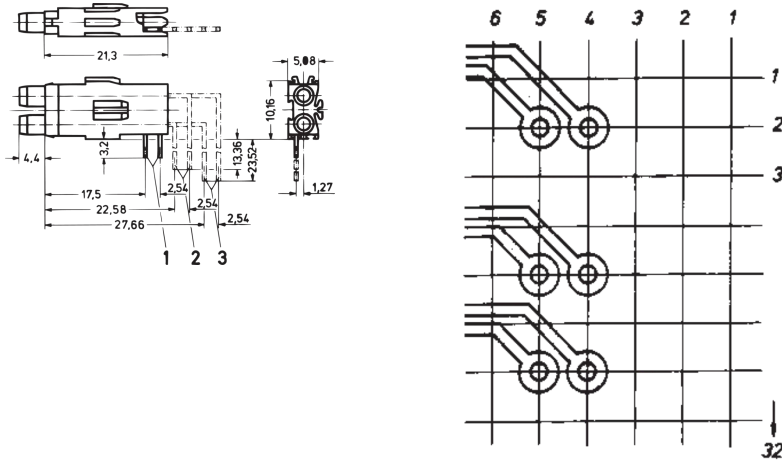

KEY FEATURES

Double test sockets for Front Element System

PRODUCT ATTRIBUTES

Product Type: Socket

Type: Short, Mounting Plane 1

Diameter: 2 mm

Voltage AC: 30 V

Max Current: 1 A

Test Voltage @ 50 Hz: 1 kV

Ambient Temperature: -25 to 70 °C

Solder Temperature: 260 °C

Flammability Rating: UL® 94V-0

Package Quantity: 10

ADDITIONAL PRODUCT DETAILS

Double test sockets for mounting plane 1 and 2, short and long type.

Solder temperature should only be applied for a maximum of 5 seconds. The plastic body should be protected from the solder wave when wave soldering.

Dimensions of connecting pins: 0.3 × 0.6-mm.

Required front panel drill hole: Ø4-mm.

Please take into consideration that deliveries may be carried out in the stated SPQs (SPQ, e.g. 5 pieces, 10 pieces, 50 pieces, etc.). Differing order quantities (e.g. 2 pieces) may be changed to the next possible delivery quantity = Standard Pack Quantity.

CERTIFICATIONS



North America

All locations
+1.763.422.2661
Chat with us:
schroff.nvent.com

Europe

Straubenhardt, Germany
+49.7082.794.0
Betschdorf, France
+33.3.88.90.64.90
Warsaw, Poland
+48.22.209.98.35
Assago, Italy
+39.02.932.7141
Chat with us:
schroff.nvent.com

Asia

Shanghai, China
+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
schroff.nvent.com

Middle East & India

Dubai, United Arab Emirates
+971.4.378.1700
Bangalore, India
+91.80.6715.2001
Istanbul, Turkey
+90.216.250.7374
Chat with us:
schroff.nvent.com



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**

© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.