


21630-697 VARISTAR CP DOUBLE GLAZED DOOR, IP20, 3-POINT LOCKING, RAL 7021, 2200H 800W

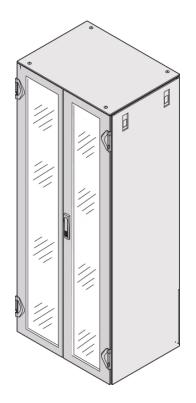

KEY FEATURES

Lever handle with key insert (2 keys)

Frame, St, 1.5 mm

Opening angle 180°

Security glass, 6 mm

Can be retrofitted with DIN profile half cylinder

Ingress protection class IP 20

Standard fitting, lock on right-hand door

PRODUCT ATTRIBUTES

Product Type: Cabinet Door

Product Family: Varistar CP

Locking Type: 3-Point Locking Color: Black Grey Color Code: RAL 7021 Rack Height: 47 U Height: 2200 mm Width: 800 mm	Type: Glass Double Door
Color Code: RAL 7021 Rack Height: 47 U Height: 2200 mm Width: 800 mm	Locking Type: 3-Point Locking
Rack Height: 47 U Height: 2200 mm Width: 800 mm	Color: Black Grey
Height: 2200 mm Width: 800 mm	Color Code: RAL 7021
Width: 800 mm	Rack Height: 47 U
	Height: 2200 mm
Protection Pating: ID20	Width: 800 mm
Totection Nating. II 20	Protection Rating: IP20

ADDITIONAL PRODUCT DETAILS

Perforated Varistar CP glass double door with 3-point locking for applications with IP 20 protection.

24U - 33U IP20 doors have 2 hinges, 38U - 52U IP20 doors have 3 hinges to ensure robust IP20 closing structures for taller cabinets

Please order lever handle 24630003 and the DIN lock separately if you want to replace the 1333 DIN lock lever handle.

Please purchase the grounding kit separately.

North America

All locations +1.763.422.2661 Chat with us: schroff.nvent.com

Europe

Straubenhardt, Germany +49.7082.794.0 Betschdorf, France +33.3.88.90.64.90 Warsaw, Poland +48.22.209.98.35 Assago, Italy +39.02.932.7141 Chat with us: schroff.nvent.com

Asia

Shanghai, China +86.21.2412.6943 Qingdao, China +86.532.8771.6101 Singapore +65.6768.5800 Shin-Yokohama, Japan +81.45.476.0271 Chat with us: schroff.nvent.com

nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

Middle East & India

Dubai, United Arab Emirates +971.4.378.1700 Bangalore, India +91.80.6715.2001 Istanbul, Turkey +90.216.250.7374 Chat with us: schroff.nvent.com



© 2024 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

Our powerful portfolio of brands:

nVent reserves the right to change specifications without notice.