

# Memory Module Specifications

## KSM26ED8/32MF

32GB 2Rx8 4G x 72-Bit PC4-2666

CL19 288-Pin DIMM

### DESCRIPTION

Kingston's KSM26ED8/32MF is a 4G x 72-bit (32GB) DDR4-2666 CL19 SDRAM (Synchronous DRAM), 2Rx8, ECC, memory module, based on eighteen 2G x 8-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR4-2666 timing of 19-19-19 at 1.2V. Each 288-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

### FEATURES

- Power Supply: VDD = 1.2V Typical
- VDDQ = 1.2V Typical
- VPP = 2.5V Typical
- VDDSPD = 2.2V to 3.6V
- Nominal and dynamic on-die termination (ODT) for data, strobe, and mask signals
- Low-power auto self refresh (LPASR)
- Data bus inversion (DBI) for data bus
- On-die VREFDQ generation and calibration
- Dual-rank
- On-board I2 serial presence-detect (SPD) EEPROM
- Temperature sensor with integrated SPD
- 16 internal banks; 4 groups of 4 banks each
- Fixed burst chop (BC) of 4 and burst length (BL) of 8 via the mode register set (MRS)
- Selectable BC4 or BL8 on-the-fly (OTF)
- Fly-by topology
- Terminated control command and address bus
- PCB: Height 1.23" (31.25mm)
- RoHS Compliant and Halogen-Free

### SPECIFICATIONS

CL(IDD)	19 cycles
Row Cycle Time (tRCmin)	45.75ns(min.)
Refresh to Active/Refresh Command Time (tRFCmin)	350ns(min.)
Row Active Time (tRASmin)	32ns(min.)
Maximum Operating Power	*
UL Rating	94 V - 0
Operating Temperature	0° C to +85° C
Storage Temperature	-55° C to +100° C

\*See IDD Specifications (page 2)

### Module Assembly




<b>DRAM: MICRON (F-DIE)</b>
-----------------------------

Continued >>

## IDD Specifications

Symbol	2666	Units
I <sub>DD0</sub>	864	mA
I <sub>PP0</sub>	45	mA
I <sub>DD1</sub>	963	mA
I <sub>DD2N</sub>	774	mA
I <sub>DD2NT</sub>	783	mA
I <sub>DD2P</sub>	684	mA
I <sub>DD2Q</sub>	756	mA
I <sub>DD3N</sub>	1062	mA
I <sub>PP3N</sub>	36	mA
I <sub>DD3P</sub>	864	mA
I <sub>DD4R</sub>	1467	mA
I <sub>DD4W</sub>	1260	mA
I <sub>DD5R</sub>	954	mA
I <sub>PP5R</sub>	54	mA
I <sub>DD6N</sub>	954	mA
I <sub>DD6E</sub>	1620	mA
I <sub>DD6R</sub>	360	mA
I <sub>DD6A</sub> (25°C)	198	mA
I <sub>DD6A</sub> (45°C)	360	mA
I <sub>DD6A</sub> (75°C)	918	mA
I <sub>DD6A</sub> (95°C)	1620	mA
I <sub>PP6X</sub>	108	mA
I <sub>DD7</sub>	1809	mA
I <sub>PP7</sub>	90	mA
I <sub>DD8</sub>	648	mA

### MODULE DIMENSIONS

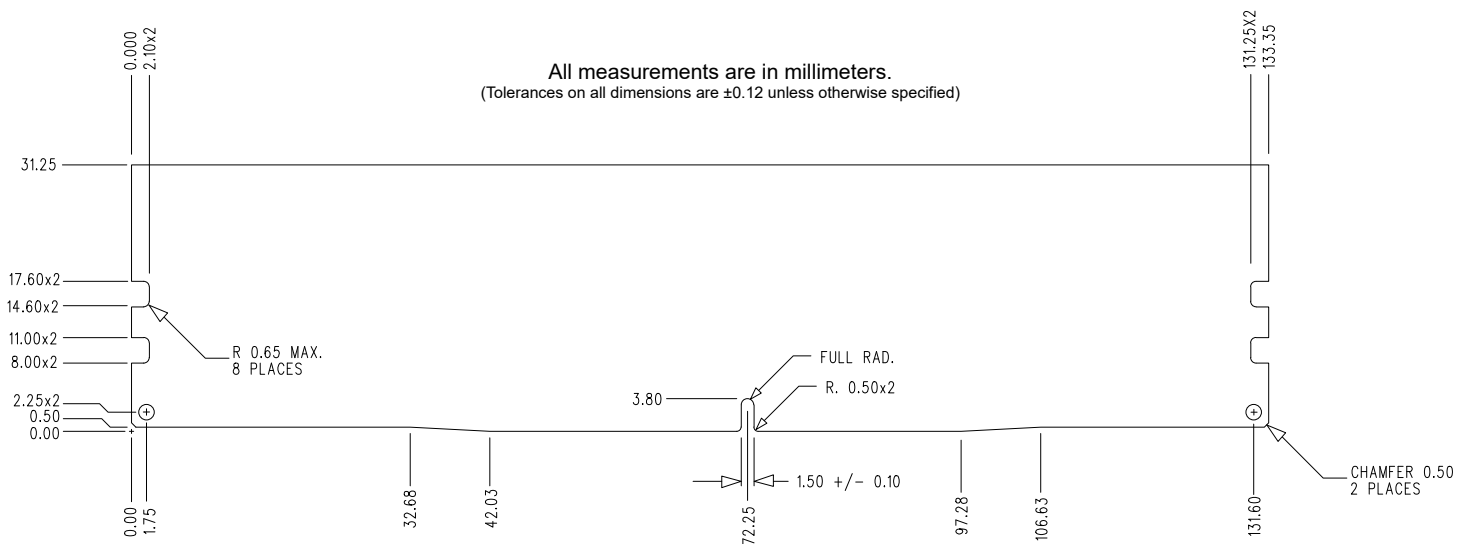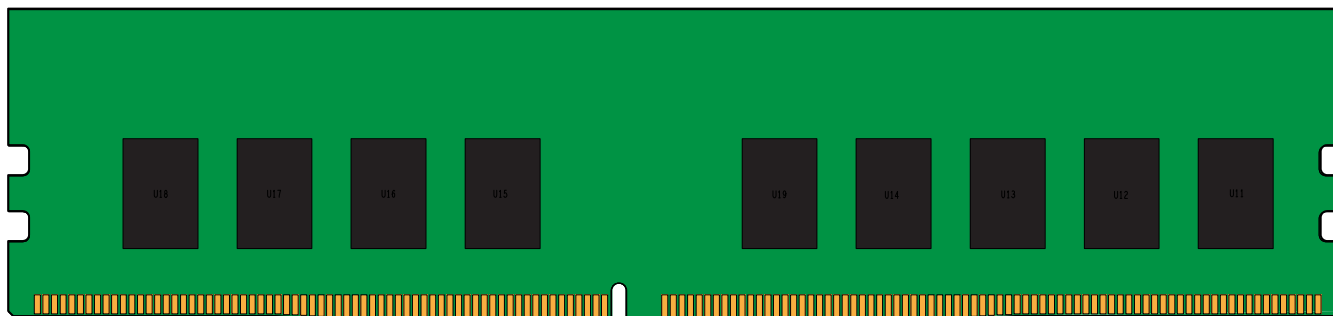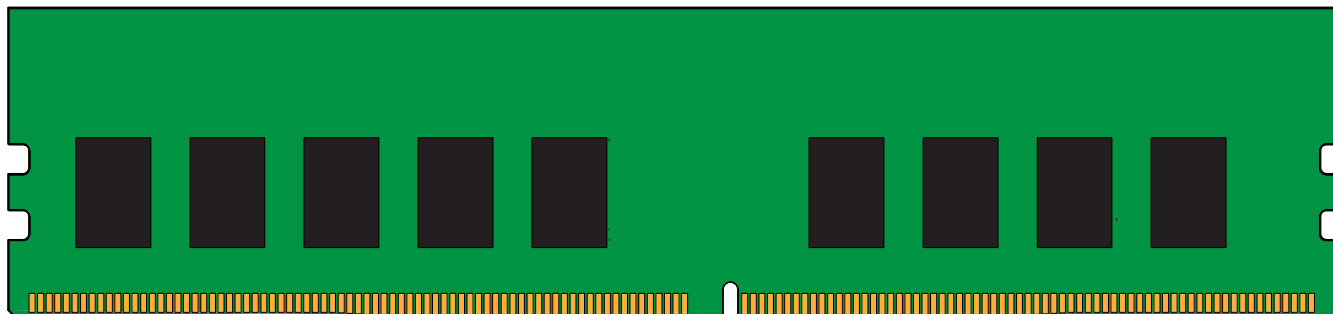

The product images shown are for illustration purposes only and may not be an exact representation of the product. Kingston reserves the right to change any information at anytime without notice.