


# ROLINE LineSecure II 1000R

<b>Product No.</b>	19.40.1113
<b>Manufacturer</b>	ROLINE
<b>Manufacturer No.</b>	19.40.1113
<b>EAN (single piece)</b>	7611990979745

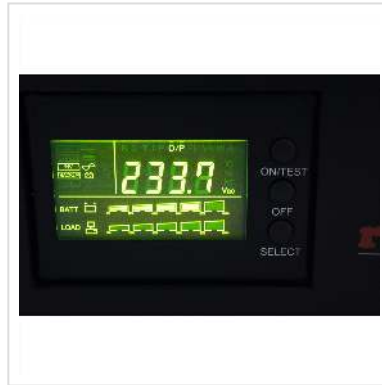

LineSecure UPS's work with the "buck & boost" line interactive technology; used when reliable protection against strong voltage fluctuations is essential. Protect against: power failure, power sag, power surge, under voltage, over voltage.

## Product features:

- Compact, quiet, user friendly
  - Desktop and 19" RM models
  - Short circuit and overload protection
  - AVR (Automatic Voltage Regulation)
  - ABM (Automatic Battery Management) increases battery life up to 50%
  - Telephone/Modem connections
  - Shutdown software including License for 1 server
  - Serial Port for advanced Power Management Software (incl, in content of delivery)
  - UPS Management Software : Windows NT/ 2k / XP / 7 / 8 /Server 2003 / 2008 / 2012 x86/x64,  
MAC OS X (Intel) 10.6.x, 10.7.x, 10.8.x Mountain Lion, 10.9.x MavericksMAC OS, LINUX
- Content: UPS, Cable set, Software CD

## Technical specifications

Manufacturer	ROLINE
Product group	UPS

Product type	UPS Line Interactive, Rackmount
Colour	black
Scope of delivery	UPS, software, cable set
Classification (IEC 62040-3)	VI-SS-333
UPS technology	Line Interactive
Power class	1000 ... 1900 VA
Output (VA/W)	1000 / 670
Efficiency	95 %
Backup time	3 min
Backup time full/half-load	3 / 6 min
Dimensions (HxWxD)	84 x 483 x 430
Mounting form	Rackmount
Voltage (input)	230V +- 15%
Voltage (output)	230V
Frequency	50Hz
Connector type (input)	Connector IEC320 C14
Outputs	4
Connector type (output)	4 x Connector IEC320 C13
Phase in/output	230V/230V / 50Hz
Over current protection	EMI,- RFI-Filter
Max. quantity of delay expansion units	0
Delay expansion unit	--
Slots for adapter card	0
Slot for adapter card	--
Acoustic level	40dBA
Interface	USB, RS232
RS-232 Interface	yes

USB 2.0 Interface	yes
Hot swap batteries	no
Bypass	no
Additional over current protector	Telephone/Fax
Activity	Display
Activity LED	--
Activity Display	LCD
incl.Management Software	Windows
Internal cooling	Active, fan
Ambient temperature	0-40°C
Operating temperature min.	0 °C
Operating temperature max.	40 °C
Height	84 mm
Width	483 mm
Depth	430 mm
Weight	20 kg
Height of packaging (single piece)	200 mm
Width of packaging (single piece)	530 mm
Depth of packaging (single piece)	580 mm
Package weight (single piece)	19 kg