


# ROLINE FTP Patch Cord Cat.5e (Class D), black, 0.5 m

<b>Product No.</b>	21.15.0185	<b>roline</b> Designed for Professionals
<b>Manufacturer</b>	ROLINE	
<b>Manufacturer No.</b>	21.15.0185	

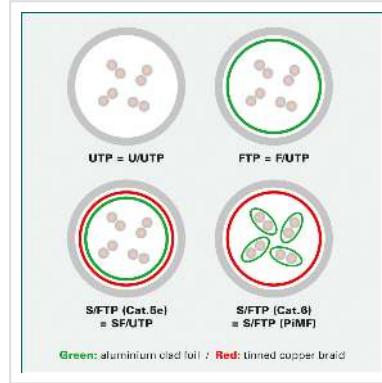

**Cat.5e**  
Class D

**F/UTP**

Patch cable for networking connections between devices. Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. High quality plugs with gold plated contacts. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 4-pair stranded copper wire. Complete shielding with aluminium clad polyester foil.

For a structured cabling system we recommend to use the following components: ROLINE Cat.5e FTP Cable, Solid Wire, AWG24: 21.15.0009 (100 m), 21.15.0010 (300 m); ROLINE Cat.5e Flush/Surface Mount Wall Jack, shielded: 25.16.8487 (white), 25.16.8486 (ivory)/25.16.8387 (white), 25.16.8386 (ivory), ROLINE Cat.5e 19" Patch Panel, 24 Ports, shielded: 26.11.0329 (light grey), 26.11.0328 (black); ROLINE Cat.5e FTP Patch Cord, grey, 5 m: 21.15.0105. Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class D specifications.

## Technical specifications

Manufacturer	ROLINE
Product group	Twisted Pair Cable
Product type	FTP Patch Cord
Colour	black
Length	0.5 m

Shield type	FTP
Transfer quality	Cat5e / Class D
Impedance	100 Ohm
Quantity of wires	8
Conductor type	Wire
Crossed	no
Locking lever	no
Anti-kink sleeve	Moulded-on
Colour (Spout)	black
Cable LSOH	no
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Weight	22.7 g
Height of packaging (single piece)	20 mm
Width of packaging (single piece)	80 mm
Depth of packaging (single piece)	120 mm
Package weight (single piece)	0.05 kg