


ROLINE RM U/FTP DataCenter Patch Cord Cat.6A (Class EA), slim, white, 2 m

| | |
|---------------------------|--------------------------|
| Product No. | 21.45.3365 |
| Manufacturer | ROLINE RECYCLED MATERIAL |
| Manufacturer No. | 21.45.3365 |
| EAN (single piece) | 7630049630369 |

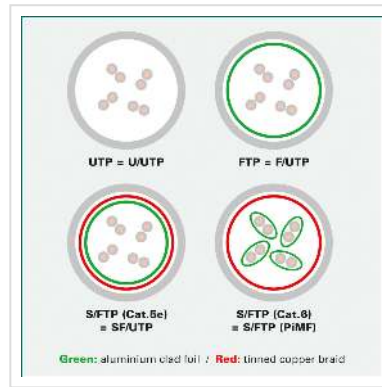

Category 6a twisted-pair patch cable with shielded RJ-45 connectors on both sides. Particularly thin and flexible cable from our ROLINE Recycled Material product line with individual pairs of wires in aluminium-laminated foil for use in confined spaces, such as in data centres.

- Durable thanks to moulded-on kink protection
- Suitable as patch cable in patch panels or as device connection cable and intended for use in the LAN
- Contact assignment: 1:1 according to EIA/TIA568, 8 cores
- Structure: 8 cores stranded wire, pairs shielded with alu-laminated foil

ROLINE RECYCLED MATERIAL products consist of more than 50% recycled materials. The packaging is even made from 100% recycled material.

Technical specifications

| | |
|---------------|--------------------------|
| Manufacturer | ROLINE RECYCLED MATERIAL |
| Product group | Twisted Pair Cable |
| Product type | FTP Patch Cord |

| | |
|------------------------------------|------------------|
| Colour | white |
| Length | 2 m |
| Shield type | FTP |
| Transfer quality | Cat6A / Class EA |
| Quantity of wires | 8 |
| Conductor type | Wire |
| Crossed | no |
| Slim cable | yes |
| Locking lever | yes |
| Anti-kink sleeve | Moulded-on |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Operating temperature min. | -20 °C |
| Operating temperature max. | 75 °C |
| Storage temperature min. | -20 °C |
| Storage temperature max. | 80 °C |
| Weight | 33.3 g |
| Height of packaging (single piece) | 20 mm |
| Width of packaging (single piece) | 100 mm |
| Depth of packaging (single piece) | 100 mm |

Package weight (single piece) 0.044 kg