


64568-096 GUIDE RAIL STANDARD TYPE, PC, 160 MM, 2.5 MM GROOVE WIDTH, RED



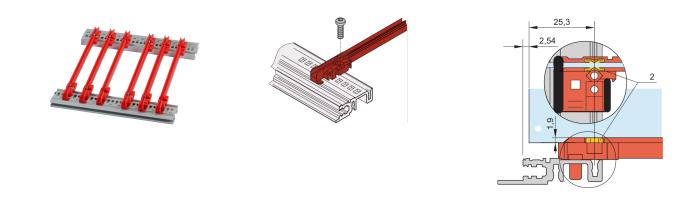

KEY FEATURES

NEW generation Standard type plastic guide rails for reliable retention of PCBs or plug-in units

Significantly increased stability, due to a optimized design and high quality material (PC)

Improved fire safety properties, fulfills EN 45545-2 requirement sets R22, R23 and R24 with HL3

"Halogen-Free", according to IEC 61249-2-21

Can be clipped into horizontal rails (Al extrusion) or into 1.5 mm thick plates

Can be bolted to the horizontal rails Type H and R for higher shock and vibration requirements

Optional ESD clip for an conductive contact between PCB and horizontal rail available

Storage temperature: from -40 °C ... 130 °C

PRODUCT ATTRIBUTES

Product Type: Guide Rail

Type: StandardWorks With: Subracks; Cases; 19" Chassis; SystemsBoard Depth: 160 mmGroove Width: 2.5Material: PolycarbonateColor: RedComplies With: EN 45545-2Package Quantity: 50

ADDITIONAL PRODUCT DETAILS

New generation of accessory type guide rails for PCBs or plug-in units. Forms a reliable interface between the subrack mechanics and the sub-assemblies.

Please take into consideration that deliveries may be carried out in the stated SPQs (SPQ, e.g. 5 pieces, 10 pieces, 50 pieces, etc.). Differing order quantities (e.g. 2 pieces) may be changed to the next possible delivery quantity = Standard Pack Quantity.

North America

All locations +1.763.422.2661 Chat with us: schroff.nvent.com

Europe

Straubenhardt, Germany +49.7082.794.0 Betschdorf, France +33.3.88.90.64.90 Warsaw, Poland +48.22.209.98.35 Assago, Italy +39.02.932.7141 Chat with us: schroff.nvent.com

nVent.com

Asia

Shanghai, China +86.21.2412.6943 Qingdao, China +86.532.8771.6101 Singapore +65.6768.5800 Shin-Yokohama, Japan +81.45.476.0271 Chat with us: schroff.nvent.com

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

Middle East & India

Dubai, United Arab Emirates +971.4.378.1700 Bangalore, India +91.80.6715.2001 Istanbul, Turkey +90.216.250.7374 Chat with us: schroff.nvent.com



© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

Our powerful portfolio of brands:

nVent reserves the right to change specifications without notice.